


## Primary Switched Battery Charging and Power Supply Unit GL1012 12V - 14V, 10A

### Power factor correction

### Hat-rail mounting

### Convection heating

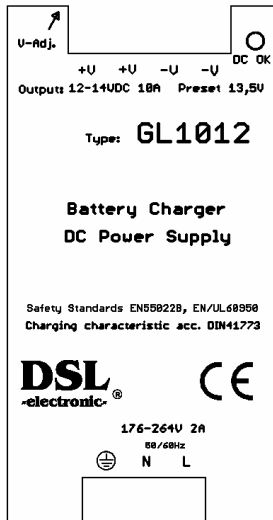

- Mains voltage 176 – 264V 47-63Hz  
248 – 370V DC, Option 88 – 132V AC
- Soft start
- Long product lifetime
- Long-term short-circuit resistance (fold back)
- Overheating protection
- Safety cutoff
- Interference class acc. to curve B
- Low output ripple
- Charging characteristics acc. to DIN 41773

### Application:

The battery charging and power supply unit GL1012 is used for charging high-quality lead or nickel-cadmium batteries and/or for supplying 12V DC circuits. The charging unit is especially suitable for use with diesel generators, where operating safety and long-term stability are necessary.

The primary clocked switching power supply with 100kHz technology is intended for use on the top-hat rail due to its high efficiency, low weight and low heat development. It is designed such that heat transport is vertical, meaning that other electronic units can be mounted on the hat rail about 5-15cm away from the power supply unit (depends on amount of heat), thus saving space.

The output of the GL1012 is connected to the battery or DC supply via protective equipment. The output voltage / final charging voltage is also kept stable during large mains fluctuations (176 - 264VAC) and high temperature variations.

When the unit is operated for longer periods at high currents and in heated environments, the charging current set is reduced automatically in order to reduce the thermal load on the components.

### Charging:

#### **Normal Charging:**

The empty battery is first charged at the constant current set. Before the preset final charging voltage is reached, the current gradually decreases. The gassing of the battery is limited and the continually reduced current causes the voltage to rise slowly until it reaches the final charging voltage. This characteristic I / U curve ensures the gradual charging of the battery.

### Settings etc.:

The GL1012 charging unit is set to a battery voltage of 13.5V in no-load operation before leaving the factory. The final charging voltage is adjusted in no-load operation using the adjuster on the bottom of the unit.

In mounting you should make sure that the PE connection (earthing clip) is connected so that the unit meets the interference requirements according to VDE and EN (see below).

The LED display on the front panel indicates that the charging and power supply unit is ready for operation (output voltage present). We recommend an additional battery undervoltage monitor for precise monitoring of the battery voltage when the GL1012 is used as a battery charging unit.

**We recommend to choose the unit power output by + 30% to guarantee utmost availability.** For example: Power of your application 80W, Unit Output Power 1.3 x 80W = 104W.

## Series / Parallel Connection:




The output current or output voltage can be increased by connecting any desired number of GL1012 charging units to the outputs in parallel. In order to ensure that the units are subjected to the same load in parallel operation, the final charging voltage in each case must be set to the same value before the units are connected. Series connected units must use an additional current off-switching at rated current or a suited current limiter.

### Technical Data :

Type	Final charging Voltage Range	Current Max.	AC Current on mains (max)	Fusing		Weight	Dimensions (mm , W x H x D)
				Prim. (Q1) acc. to EN60 898	Sek. (Q2)		
GL1012	12 - 14V	10A	2,0A (230V)	4A B (230V)	16A B	0,8kg	65,5x125,2x100

Mounting	: 35mm Hat rail TS-35/7,5 or 15mm
Supply	: 176 – 264V 47 – 63Hz, 248 – 370V DC, Option 88 – 132V AC
Inrush consumption max.	: 60A/230VAC
Lost current	: <3,5mA / 240V
Efficiency	: 80%
Output voltage	: Range 12 – 14V, Hum and Noise <80mVpp
Output current	: 0 – 10A (rated)
Final charging voltage	: Tolerance 0,01% / °C
Charging characteristics	: IU – Char. acc. to DIN 41773 (appr. +/- 1% Tolerance) and DIN 57510 with reduced Current (Wa) in the area of final charging voltage (appr. 3,5% of setting)
Soft start	: Appr. 600ms up to maximum output power
Overload	: 105 – 150% of rated output current (10A) according mains voltage, Output voltage, Overtemperature- and Current limiting, Short circuit proofed, with Fold-back function independent switch on after short circuit or overload
Over voltage	: 15 -16,5V, automatic swich off and switch on again
Ambient temperature	: -10°C up to +60°C , see derating-diagramm
Storing temperatures, hum.	: -20°C up to +85°C, 10 – 96%RH
Relative air humidity	: 20 – 90% RH not condensed
Vibration	: 10 – 500Hz, 2G 10min./1 period, 60min. in each axis X, Y, Z
Type of protect., Connections	: IP00, Input connections each 4 qmm, Output connections each 2 x 4 qmm
Terminal torque / Wire	: 0.7 N.m / copper only, mimimum 80°C wire
Maintenance	: No
Service live	: > MTBF 136.800 hours , MIL HDBK-217F (25°C)
Safety standard	: EN60950
Voltage protection	: Mains / Output 3kVAC, Mains / Screen 1,6kVAC, Output / Screen 0,5kVAC
Isolation resistance	: Mains / Output , Mains / Screen und Output / Screen 100MOhm/ 500VDC
Radio Interference	: EN55011, EN55022 (CISPR22) Kl. B
Harmonic Currents	: EN 61000-3-2, -3
Interference Immunity	: EN61000-4-2,3,4,5,6,8,11, ENV50204, EN55024, EN61000-6-2 (EN50082-2) Very heavy industrial environment, criterion A

### **Connecting example / Derating diagrams**

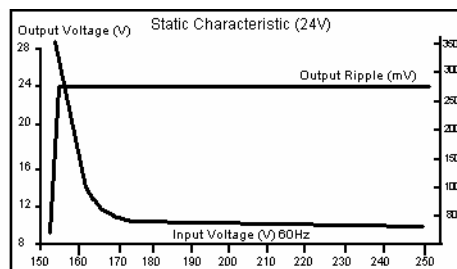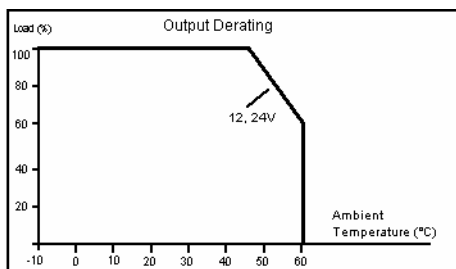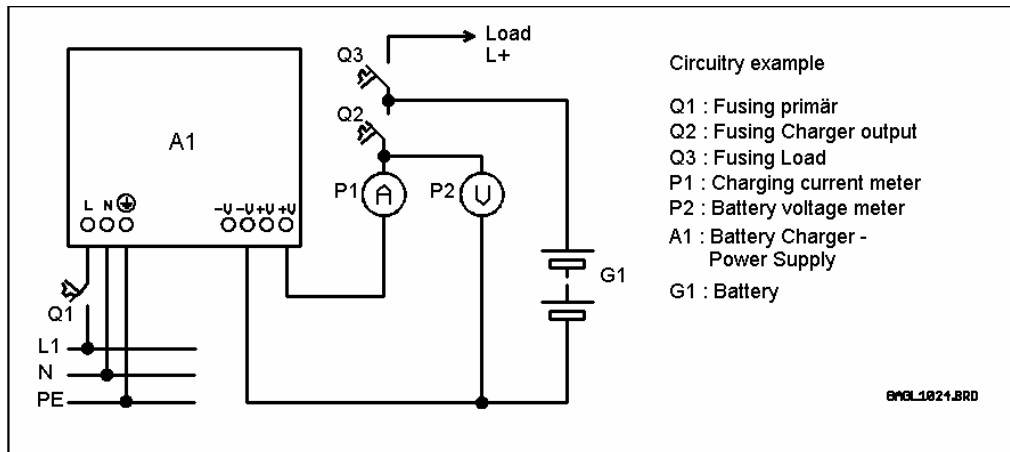

## Note for wiring power supplies and chargers of the GL-Series

