

T2900 3 Ph. Differential Current Relay

- Protection of generators against differential currents
- Visual indication of power, pick-up and relay tripping
- High precision digital countdown timer for delayed output
- Normal function upon loss of supply due to built-in energy source
- Accepts high supply voltage variations: 60 - 110%
- Cost effective and highly reliable compact design
- 50 hours burn-in before final test
- Operating temperature range: -20°C to +70°C
- Designed according to the rules of major marine classification societies
- Flame retardant enclosure
- DIN rail or screw mounting

Application

The T2900 3 Phase Differential Relay is intended as a protection relay for generators, power transmissions and consumer's supply by tripping the main circuit breaker.


The T2900 is part of the SELCO T-Line series with modular units for protection, control and monitoring of generators, both in marine and land-based applications. The T2900 is designed according to the rules of major marine classification societies.

Function

The T2900 measures the differential current of each of the 3 phases. The differential currents are measured by connecting current transformer for each winding in parallel with inverse polarity. The highest of the 3 differential currents is selected and, if this exceeds the preset level (0.04 - 0.4 x I_N), the pick-up LED will indicate and the delay timer will be started.

After the preset time has expired, the output relay and the corresponding LED will be activated, provided that the current level was exceeded for the entire delay time.

The timedelay can be adjusted between 1 - 10 sec. This time delay can be reduced by a factor 10 by bridging terminal 18 and 19.

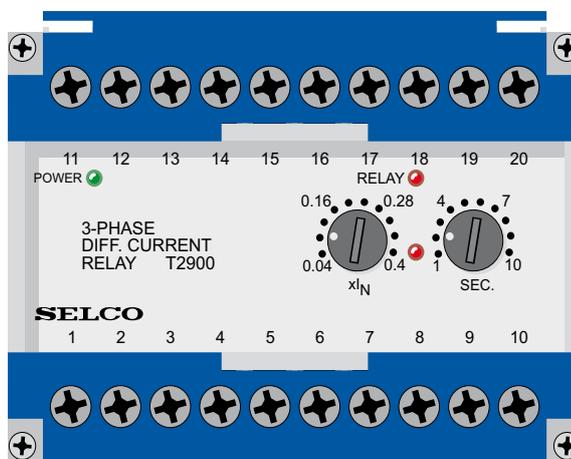

The output relay is a latching relay. The latching can be reset or disabled by bridging terminals 5 and 6.

other devices than the T2900. See connection diagram.

Installation

The supply voltage is connected to terminals 1 and 3 or terminals 2 and 3, according to the supply source.

The current setting can be calculated according to the following example:

Differential current protection of a generator.
 Required trip level: 20%
 Generator rating: 695A
 Current transformer: 800/5A
 Setting: $20 \times 695 / 800 = 17\% = 0.17 \times I_N$

The T2900 is connected to the measuring current coming from the current transformers secondary via terminals 11-12, 13-14 and 15-16. The current transformer on both sides must be of same type and the cables lengths must be the same, so that the cable resistance is the same. The current transformers should not be connected to

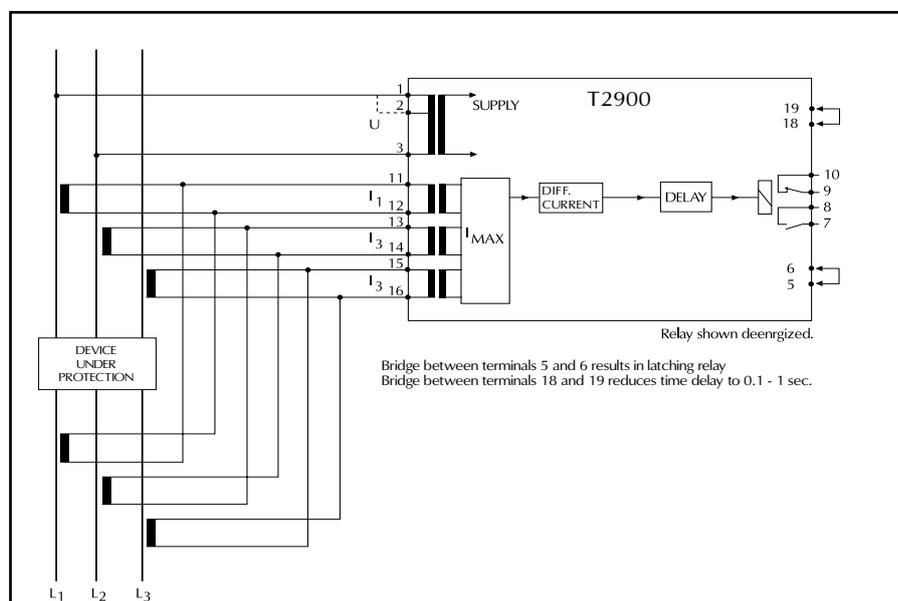


Fig. 2. Connection diagram.

Specifications

T2900 3 Ph. Differential Current Relay

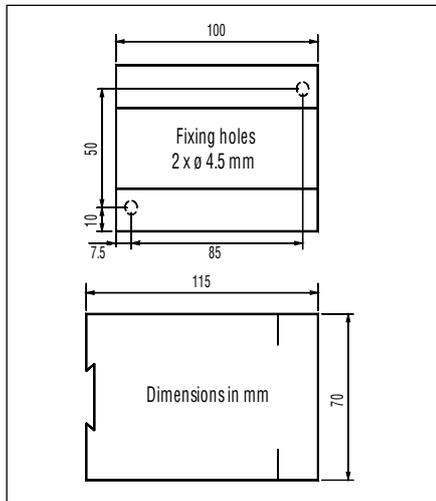


Fig. 3. Dimensions.

Troubleshooting

- 1) If the relay is not operating please check that the power LED is on, ensuring that the supply is present.
- 2) Measure the supply voltage which must be compatible with the information label on top of the enclosure.
- 3) Measure the current levels in terminals 11-12, 13-14 and 15-16 and check that at least one of the currents is above setting.

For example:

$1 \times I_N = 5A$; $2 \times I_N = 10A$

Trip level	0.04 – 0.4 x I_N
Delay	1 - 10 sec. (0.1 - 1 sec. when bridging terminals 18 and 19)
Max. voltage	660V
Voltage range	60 - 110%
Consumption	Voltage 5VA at U_N Current 0.3VA at I_N
Continuous current	$2 \times I_N$
Frequency range	45 - 400Hz
Output relay	Normally dr-energized, latching, resettable
Contact rating	AC: 400V, 5A, 2000VA DC: 150V, 5A, 150W
Overall accuracy	±5%
Repeatability	±1%
Operating temperature	-20°C to +70°C
Dielectric test	2500V, 50Hz
EMC	CE according to EN50081-1, EN50082-1, EN50081-2, EN50082-2
Burn-in	50 hours before final test
Enclosure material	Polycarbonate. Flame retardant
Weight	0.5kg
Dimensions	70 x 100 x 115mm (H x W x D)
Installation	35mm DIN rail or 4mm (3/16") screws

The specifications are subject to change without notice.

Type Selection Table

Standard types: $I_N = 5A$ and output relay normally de-energized.

Type	Terminals		I_N	Function
	1-3	2-3		
T2900.0010	450V	400V	5A	
T2900.0020	230V		5A	
T2900.0030	480V	415V	5A	
T2900.0040	110V	100V	5A	

Other combinations and voltages are available on request.

Main office:
 SELCO A/S
 Betonvej 10
 DK-4000 Roskilde
 Denmark
 Phone: + 45 7026 1122
 Fax: + 45 7026 2522
 e-mail: selco.dk@selco.com
 www.selco.com